




STANDARD KERB & GUTTER
(SA)

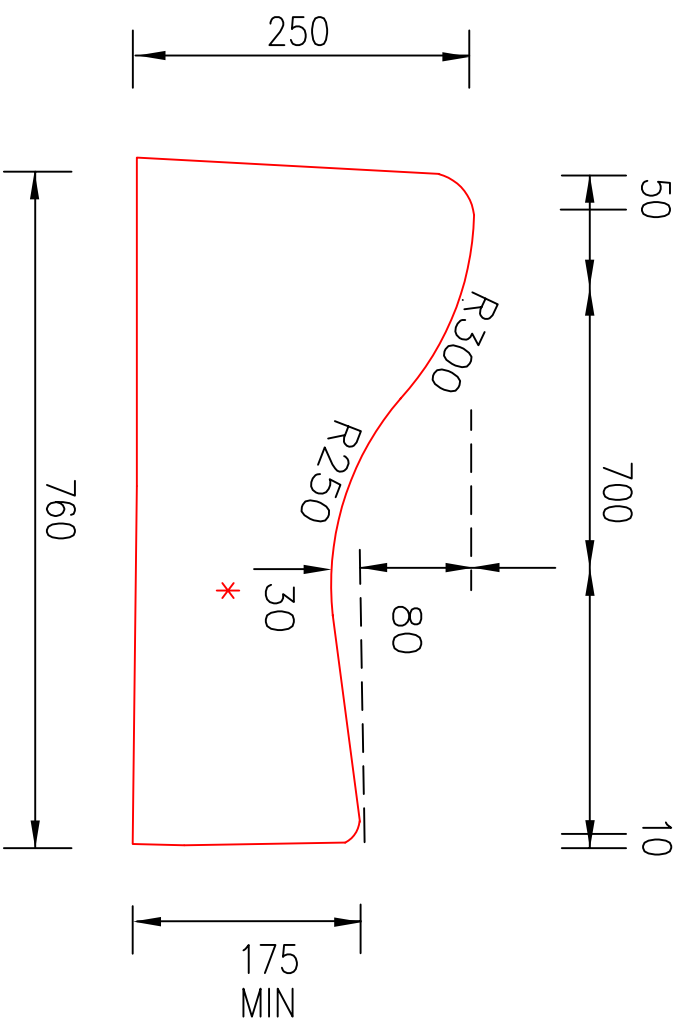


ROLL KERB & GUTTER
(RT)

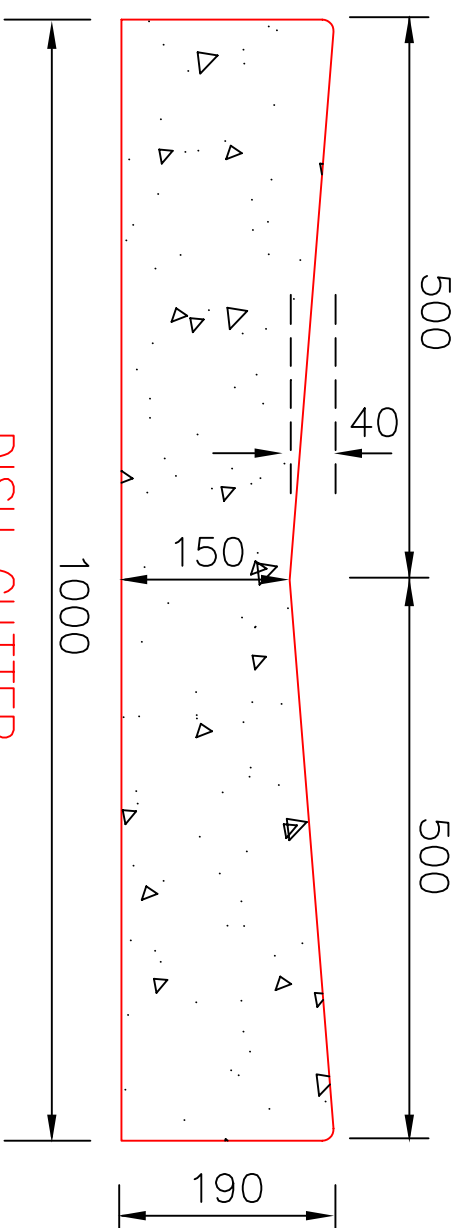

DISH GUTTER
(SB)

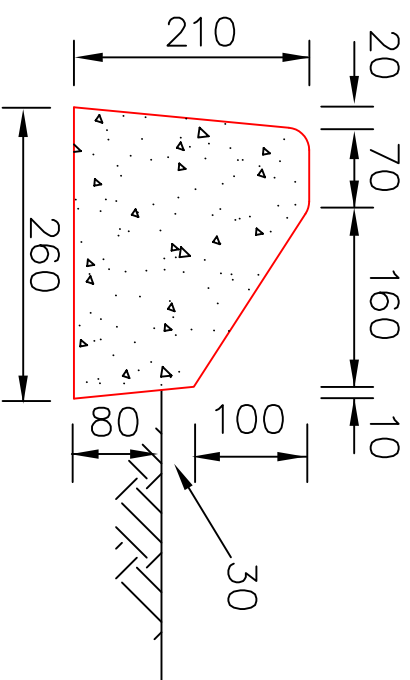

MOUNTABLE KERB
(SF)

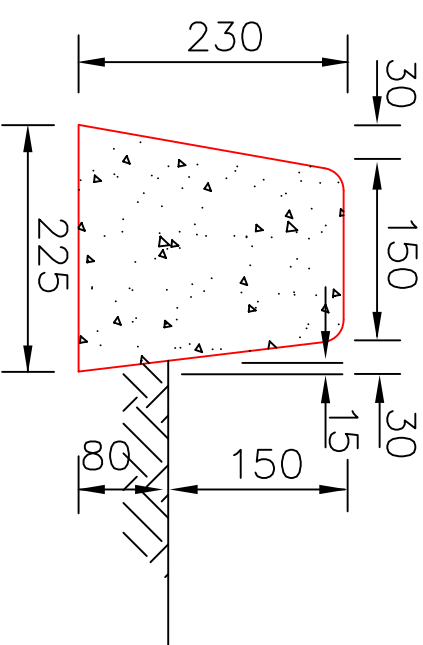

KERB ONLY OR BARRIER KERB
(SM)

NOTE:

1. CONCRETE TO BE 20 MPa UNLESS OTHERWISE SPECIFIED
2. ALL EXPOSED CORNERS TO HAVE A RADIUS OF 10 UNLESS OTHERWISE SPECIFIED
3. ALL DIMENSIONS IN MILLIMETRES
- * THINNEST PART OF KERBS TO BE MINIMUM 150 IRRESPECTIVE OF CONSTRUCTION TOLERANCES.
4. SOME KERB DIMENSIONS SLIGHTLY VARY FROM RTA STANDARDS
5. REFER TO CHAPTER 10 FOR JOINT TYPE, LOCATION & SPACING REQUIREMENTS
6. REFER CHAPTER 10 FOR CONSTRUCTION TOLERANCES.

SNOWY RIVER SHIRE COUNCIL

Surveyed By	Drawn By	Scale
Job No	Checked By	
Disk No	Passed By	N.T.S.
Approved By	Date	Datum
Sheet No	Ref. No	Plan No